



X	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	X	
Y																													
U																													
T																													
S																													
R																													
Q																													
P																													
O																													
N																													
M																													
L																													
K																													
J																													
I																													
H																													
G																													
F																													
E																													
D																													
C	DIMENSIONS ARE IN INCHES (MM) TOLERANCES ARE AS FOLLOWS, UNLESS NOTED $1/X_{+} + 1/8"$ (3mm) $1/XX_{+} + 1/16"$ (1mm) $.0X_{+} + .01"$ (.25mm) $.00X_{+} + .005"$ (.1mm) ANGLES $\pm 1^{\circ}$				REVISION	REV.	DESCRIPTION OF	REV'D	APP'D	<p style="text-align: center;"><b>Glo-Quartz<sup>®</sup> Incorporated</b></p> <p style="text-align: center;">Industrial Electric Heaters &amp; Controls since 1952</p> <p style="text-align: center;">1550 South Euclid Avenue Tucson, Arizona 85713</p> <p style="text-align: center;"><small>This document is the property of Glo-Quartz Incorporated It is provided for customer use only, and is not to be disclosed to other sources for any reason without express written approval from Glo-Quartz. Possession does NOT constitute approval.</small></p>										TITLE: <b>TERMINAL TYPES</b>									
B	NOTES:				DATE	NUMBER	REVISION	BY	BY											CUSTOMER:									
A																				DESIGN BY:		DESIGN DATE:							
Y																				DRAWN BY:		DRAWN DATE:							
																				CHECKED BY:		CHECK DATE:							
																				RELEASED FOR:		SCALE:	SHEET No.:						
										DRAWING NUMBER:		REV.:																	
X	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	X	



**TYPE P**  
PLAIN TERMINAL PIN  
SPECIFY LENGTH



**TYPE FZ**  
FLEXIBLE LEAD  
SPECIFY LENGTH




**TYPE E**  
RIGHT ANGLE  
LUG TERMINAL




**TYPE T**  
STUD TERMINAL  
8-32 X 1" OR 10-32 X 1"




**TYPE S**  
QUICK-DISCONNECT SPADE




**TYPE L**  
TERMINAL LUG  
SPECIFY DIRECTION



**TYPE B**  
WATER TIGHT BULKHEAD  
FITTING, SPECIFY: 5/8-18,  
3/4-16, BRASS, STEEL OR  
STAINLESS STEEL



**TYPE LR**  
LOCATER RING, SPECIFY DIMENSION  
FROM END OF SHEATH, METAL  
ELEMENTS ONLY

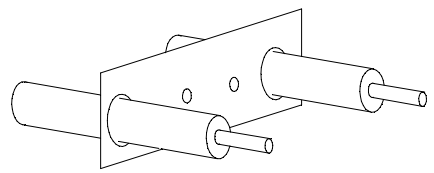

**TYPE MF**  
MOUNTING BRACKET.  
SPECIFY HOLE SIZE,  
LOCATION AND NUMBER

REVISION	REV.	DESCRIPTION OF	REV'D	APP'D
DATE	NUMBER	REVISION	BY	BY

**Glo-Quartz<sup>®</sup> Incorporated**

Industrial Electric Heaters & Controls since 1952

1550 South Euclid Avenue  
Tucson, Arizona 85713

This document is the property of Glo-Quartz Incorporated  
It is provided for customer use only, and is not to be  
disclosed to other sources for any reason without express  
written approval from Glo-Quartz. Possession does NOT  
constitute approval.

TITLE: <b>TERMINAL TYPES</b>			
CUSTOMER:			
DESIGN BY:		DESIGN DATE:	
DRAWN BY:		DRAWN DATE:	
CHECKED BY:		CHECK DATE:	
RELEASED FOR:		SCALE:	SHEET No.:
DRAWING NUMBER:		REV.:	