




"B" = IMMERSION LENGTH

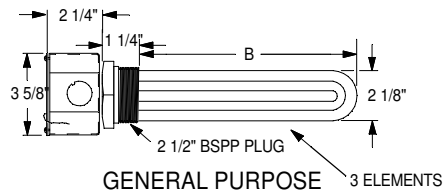


GENERAL PURPOSE 3 ELEMENTS

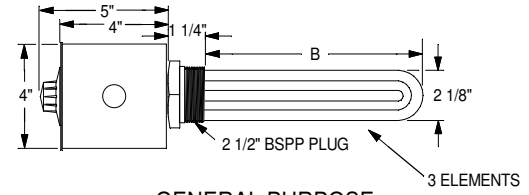


GENERAL PURPOSE WITH THERMOSTAT 3 ELEMENTS

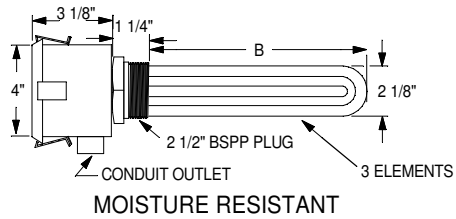


MOISTURE RESISTANT 3 ELEMENTS

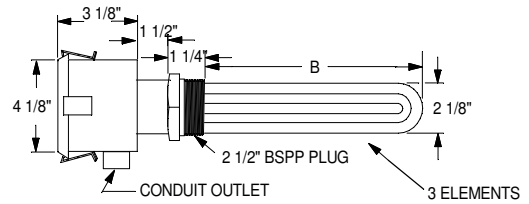

MOISTURE RESISTANT WITH THERMOSTAT 3 ELEMENTS

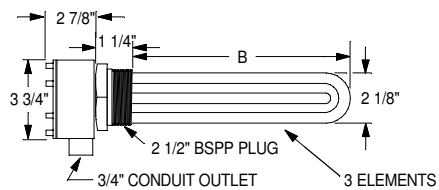

EXPLOSION RESISTANT 3 ELEMENTS

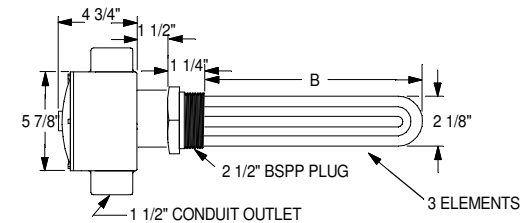

EXPLOSION RESISTANT WITH THERMOSTAT 3 ELEMENTS

DIMENSIONS ARE IN INCHES (MM)
 TOLERANCES ARE AS FOLLOWS, UNLESS NOTED
 1/XX, ± 1/8" (2mm) 1/XX, ± 1/16" (1mm)
 .0XX, ± .01" (.25mm) .00XX, ± .005" (.1mm)
 ANGLES ± 1°

NOTES:

REVISION DATE	REV. NUMBER	DESCRIPTION OF REVISION	REV'D BY	APP'D BY

Glo-Quartz® Incorporated

Industrial Electric Heaters & Controls since 1952

1550 South Euclid Avenue
 Tucson, Arizona 85713

This document is the property of Glo-Quartz Incorporated
 It is provided for customer use only, and is not to be
 disclosed to other sources for any reason without express
 written approval from Glo-Quartz. Possession does NOT
 constitute approval.

TITLE: PPG SERIES
 3 ELEMENTS

CUSTOMER:	
DESIGN BY:	DESIGN DATE:
DRAWN BY:	DRAWN DATE:
CHECKED BY:	CHECK DATE:
RELEASED FOR:	SCALE:
DRAWING NUMBER:	SHEET No.:
	REV.: